Freeform Search

Database:

US Pre-Grant Publication Full-Text Database
US Patents Full-Text Database
US OCR Full-Text Database
EPO Abstracts Database
JPO Abstracts Database
Derwent World Patents Index
IBM Technical Disclosure Bulletins

Term:

dynamic feedback control and robot$6

Display: 100 **Documents in Display Format:** CIT **Starting with Number** 1

Generate: ○ Hit List ⊙ Hit Count ○ Side by Side ○ Image
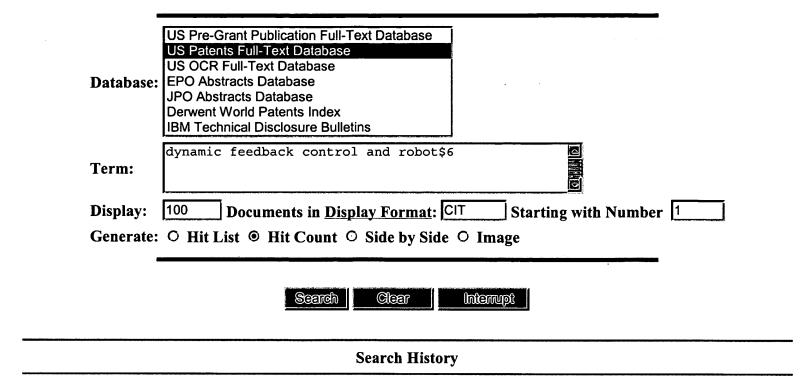
| Search | Clear | Interrupt |

Search History

DATE: Tuesday, March 02, 2004   Printable Copy   Create Case

Set Name Query side by side	Hit Count	Set Name result set
DB=USPT; PLUR=YES; OP=ADJ		
L3 dynamic feedback control and robot$6	3	L3
L2 dynamic feedback control same robot$6	0	L2
L1 6511442.pn.	1	L1

END OF SEARCH HISTORY

☐ **Generate Collection**

L3: Entry 3 of 3   File: USPT   Jul 4, 2000

DOCUMENT-IDENTIFIER: US 6084205 A
TITLE: Method for enhanced control of welding processes

Brief Summary Text (5):
Arc welding, and particularly gas tungsten arc (GTA) welding, is perhaps one of the most widely
used manufacturing processes in the world. As a consequence, great efforts have been made to
automate the process and, in particular, to use robotic welders in order to increase
productivity and to improve the uniformity and quality of these welds. However, continued
development of automated welding processes, particularly those carried out by general purpose
manufacturing robots, require continuous information relevant to the quality of the weld being
made. This information must, of necessity, be furnished on a real time basis, as the weld is
being made, in order to be used as part of a feed-back mechanism to control critical parameters
of the welding process.

Detailed Description Text (2):
The present invention provides a method and apparatus for controlling welding processes, in
general, and for GTA welding, in particular, by measuring weld penetration and using the data
derived therefrom, coupled with the use of dynamic feedback, to control welding process
parameters. As will become evident to those skilled in the art from the following detailed
description, the present invention is useful in many welding applications, such as e-beam
welding and seam tracking, laser welding and seam tracking, and precision gas welding. However,
for the purposes of illustration and convenience in introducing the present invention,
application to GTA welding will be used as an example.

Detailed Description Text (5):
After passing through filter 120, light beam 115 enters video camera 125. Data from video
camera 125 is fed to weld pool sizer W. Weld pool sizer W includes frame grabber 130 that
captures a single video frame of the weld pool, such as that shown in FIG. 3, and uses a high
speed analog-to-digital converter to digitize the analog video signal into discrete values
representing the strength of the incoming video signal. A frame rate of at least 10 frames a
second is required to handle controlling the weld process (control loop bandwidth is about 3
hz). The digitized data from frame grabber 130 is mapped onto a 100.times.100 pixel array. An
imaging board 135, such as available from Spectrum Signal Processing, Burnaby, Quebec, Canada,
performs a thresholding operation on the 100.times.100 pixel array to elevate all pixel
intensities above a specific value to the maximum intensity and lowers all intensities below a
specific level to the minimum intensity. The intensity level is set by manually adjusting the
video camera iris so that the maximum weld pool intensity is approximately 98% of the maximum
analog-to-digital scale such that no saturation occurs. The result of the thresholding
operation is a two dimensional, black and white representation of the backside weld pool, FIG.
4(a), which is sent to signal processor 140 where the center of mass of the weld pool is
calculated, FIG. 4(b). After determining the center of mass, signal processor 140 then
determines the width and length of the backside weld pool, FIG. 4(c). It should be noted that
the area of the weld pool can also be determined by a simple pixel count. These dimensions of
the backside weld pool are then sent to controller 145 along with a desired value of the
dimension(s) of the weld pool, the weld pool set point(s). The difference between the dimension
(s) determined by signal processor 140 and the weld pool set point(s) is are used by controller
145 to control the welding current supplied by welder 150 to torch 155 by means of a dynamic
feedback control algorithm.